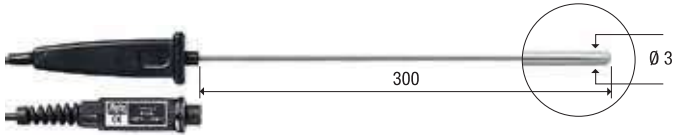

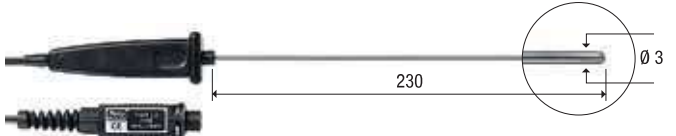

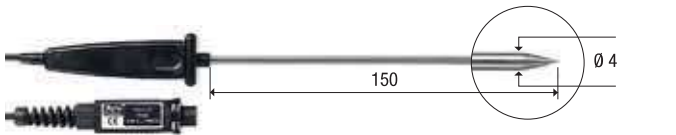

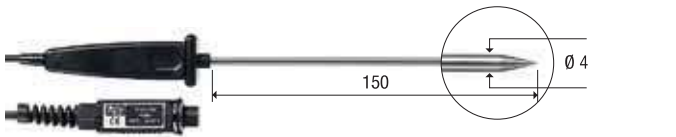

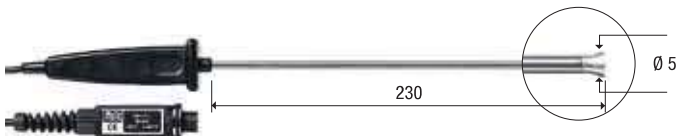

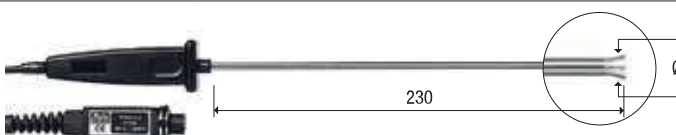

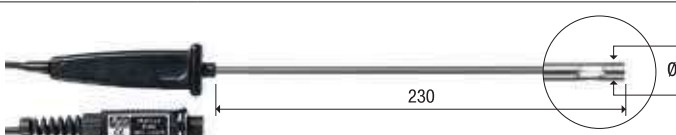

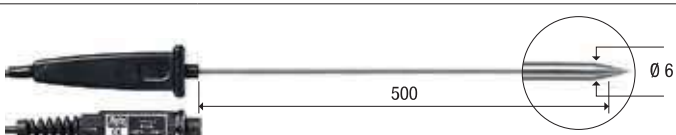

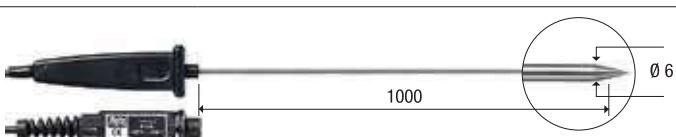



Pt100 PROBES FOR PORTABLE INSTRUMENTS EQUIPPED WITH SICRAM MODULE

CODE	°C max	τ s	DIMENSIONS	USE
TP 472 I	-196 +500	3s		
TP 472 I.0 1/3 DIN Thin Film	-50 +300	3s		
TP 473 P.I	-50 +400	5s		
TP 473 P.O 1/3 DIN Thin Film	-50 +300	5s		
TP 474 C.I	-50 +400	5s		
TP 474 C.O 1/3 DIN Thin Film	-50 +300	5s		
TP 475 A.0 1/3 DIN Thin Film	-50 +250	12s		
TP 472 I.5	-50 +400	3s		
TP 472 I.10	-50 +400	3s		

Temperature



Pt100 PROBES FOR PORTABLE INSTRUMENTS EQUIPPED WITH SICRAM MODULE

CODE	°C max	τ s	DIMENSIONS		USE
TP 49 A.O Class A Thin Film	-70 +250	3,5s			
TP 49 AC.O Class A Thin Film	-70 +250	5,5s			
TP 49 AP.O Class A Thin Film	-70 +250	4s			
TP 87.0 1/3 DIN	-50 +200	3s			
TP 878.0 1/3 DIN Thin Film	+4 +85	60s	<p>Contact probe for solar panels equipped with SICRAM module. Cable L = 2m.</p>		
TP 878.1.0 1/3 DIN Thin Film	+4 +85	60s	<p>Contact probe for solar panels equipped with SICRAM module. Cable L = 5m.</p>		
TP 879.0 1/3 DIN Thin Film	-20 +120	60s	<p>Penetration probe for compost equipped with SICRAM module. Cable L = 2m</p>		
TP 880/300.I	-50 +450	60s	<p>Mini DIN head. Cable L = 2m</p>		
TP 880/600.I	-50 +450	60s	<p>Mini DIN head. Cable L = 2m</p>		
TP 875.I	-30 +120	15'	<p>Globe-thermometer probe for measuring radiant heat \varnothing150 mm. (ISO7243, ISO7726). 4 wires Pt100 Sensor cable L=2m. Equipped with SICRAM module.</p>		
TP 876.I	-30 +120	15'	<p>Globe-thermometer probe for measuring radiant heat \varnothing50 mm. (ISO7243, ISO7726). 4 wires Pt100 Sensor cable L=2m. Equipped with SICRAM module.</p>		

Pt100 / Pt1000 SENSOR PROBES WITH TP 47 MODULE

CODE	°C max	τ s	DIMENSIONS	USE
TP 47.100.0 (Pt100) 1/3 DIN Thin Film	-50 +250	3s		
TP 47.1000.0 (Pt1000) 1/3 DIN Thin Film	-50 +250	3s		
TP 87.100.0 (Pt100) 1/3 DIN Film sottile	-50 +200	3s		
TP 87.1000.0 (Pt1000) 1/3 DIN Thin Film	-50 +200	3s		
TP 47			Only connector for connection of probes without SICRAM module: direct 3 and 4 wires Pt100, 2 wires Pt1000. 	

Pt100 SENSOR PROBES FOR OBSOLETE INSTRUMENTS

CODE	°C max	τ s	DIMENSIONS	USE
TP 870.0 1/3 DIN Thin Film	-50 +250	3s		
TP 870 C.0 1/3 DIN Thin Film	-50 +250	5s		
TP 870 P.0 1/3 DIN Thin Film	-50 +250	5s		
TP 870 A.0 1/3 DIN Thin Film	-50 +250	12s		
TP 871.0 1/3 DIN Thin Film	-50 +200	3s		
TP 872/500.I	-50 +400	10s		
TP 872/1000.I	-50 +400	10s		
TP 873.I	-50 +400	6s		

Temperature

Pt100 SENSOR PROBE

CODE	°C max	τ s	DIMENSIONS		USE
TP 874.I 1/3 DIN	-30 +200	3s			
TP 875.1.I	-30 +120	15'	<p>Globe thermometer probe for measuring radiant head $\varnothing 150\text{mm}$ (ISO7243, ISO7726). 4 wires Pt100 sensor. Cable L = 2m.</p>		
TP 876.1.I	-30 +120	15'		<p>Globe thermometer probe for measuring radiant head $\varnothing 50\text{mm}$ (ISO7243, ISO7726). 4 wires Pt100 sensor. Cable L = 2m.</p>	
TP 877.I	-200 +400	3s			
TP 878.1SS.0 1/3 DIN Thin Film	+4 +85	60s	<p>Contact probe for solar panels without SICRAM module. Cable L = 5m.</p>		
TP 879.1.0 1/3 DIN Thin Film	-20 +120	60s	<p>Penetration probe for compost without SICRAM module. 4 wires cable L = 2m.</p>		
TP 9 A.O	-70 +250	3,5s	CLASS A thin film		
TP 93.I	-70 +400	3,5s	1/3 DIN thin film		
TP 9 AC.O	-70 +250	5,5s	CLASS A thin film		
TP 93 C.I	-70 +400	5,5s	1/3 DIN thin film		
TP 9 AP.O	-70 +250	4s	CLASS A thin film		
TP 93 P.I	-70 +400	4s	1/3 DIN thin film		
TP 32MT.1P.I 1/3 DIN	-40 +100	5s			
TP 32MT.2.I 1/3 DIN	-40 +100	5s			

At temperatures above 400°C avoid violent impacts or thermal shocks. Pt100 sensor can be irreparably damaged.

INDUSTRIAL PROBES WITH Pt100 SENSOR

CODE	°C max	DIMENSIONS	
HD 882 E 100	-50 +300		
HD 882 M 100/300 HD 882 M 100/600 HD 882 DM 100/300 HD 882 DM 100/600	-50 +450		